

(19) World Intellectual Property
Organization
International Bureau



21 JAN 2005

(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/010745 A1

(51) International Patent Classification⁷: **H05G 2/00**

(21) International Application Number:
PCT/SE2003/001225

(22) International Filing Date: 18 July 2003 (18.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0202320-8 23 July 2002 (23.07.2002) SE

(71) Applicant (for all designated States except US): JETTEC
AB [SE/SE]; c/o Hertz, Rådjursvägen 16, S-182 79 Stock-
sund (SE).

Göran [SE/SE]; Öregrundsgatan 9-102, S-115 59 Stock-
holm (SE). HERTZ, Hans [SE/SE]; Rådjursvägen 16,
S-182 79 Stocksund (SE). DE GROOT, Jaco [NL/SE];
Hammarbyvägen 30B-2, S-120 79 Stockholm (SE).

(74) Agent: AWAPATENT AB; Box 45086, S-104 30 Stock-
holm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ (utility model), CZ, DE (utility model), DE, DK (utility
model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI
(utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT,
LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SI, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): JOHANSSON,

(84) Designated States (regional): ARIPO patent (GI, GM,
KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: CAPILLARY TUBING

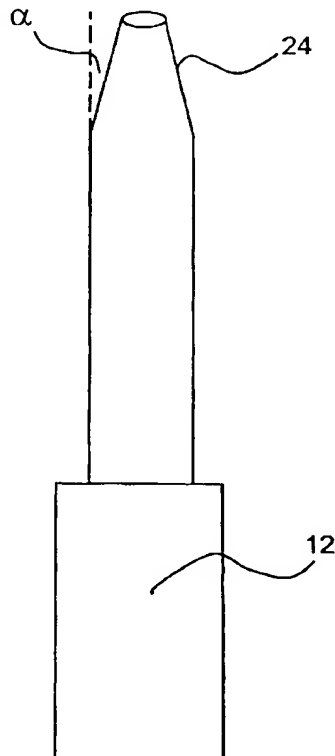

(57) **Abstract:** A method and arrangement for generating x-ray or EUV radiation are disclosed. Target material is supplied from a container for target material to a jet-forming orifice in an interaction chamber by means of a flexible capillary tubing of considerable length, wherein the orifice is an integral part of the capillary tubing. A jet formed by urging target material through the orifice is made to interact with a beam of energy, thus producing a radiating plasma emitting the desired electromagnetic radiation. The use of a flexible capillary tubing for supplying target material from a source of target material to an orifice, which is integrated with the tubing, within an interaction chamber, in order to form therein a jet of target material for interaction with an energy beam to generate x-ray or EUV radiation, is also disclosed.

WO 2004/010745 A1